


NOTES:


1. FAN CONNECTIONS SHOWN HAVE BEEN DESIGNED TO RESIST WIND LOADS OUTLINED IN 2004 FLORIDA BUILDING CODE, CHAPTER 16, FOR 140 MPH EXPOSURE "C" WIND VELOCITY, AND FOR ASCE 1-98 CHAPTER 6.0, 140 MPH EXPOSURE "C" WIND VELOCITY, TYPICALLY. MAXIMUM MEAN ROOF HEIGHT = 20'-0", TYPICALLY
2. NAIL CAPACITIES AND EMBEDMENTS ARE BASED UPON "NATIONAL DESIGN SPECIFICATION FOR STRESS GRADE LUMBER AND FASTENINGS" AS PUBLISHED BY THE NATIONAL FOREST PRODUCTS ASSOCIATION.

NOTE: REMOVE ANY ROOFING NAILS IN THE AREA WHERE THE BASE WILL BE SLID UNDER SHINGLES

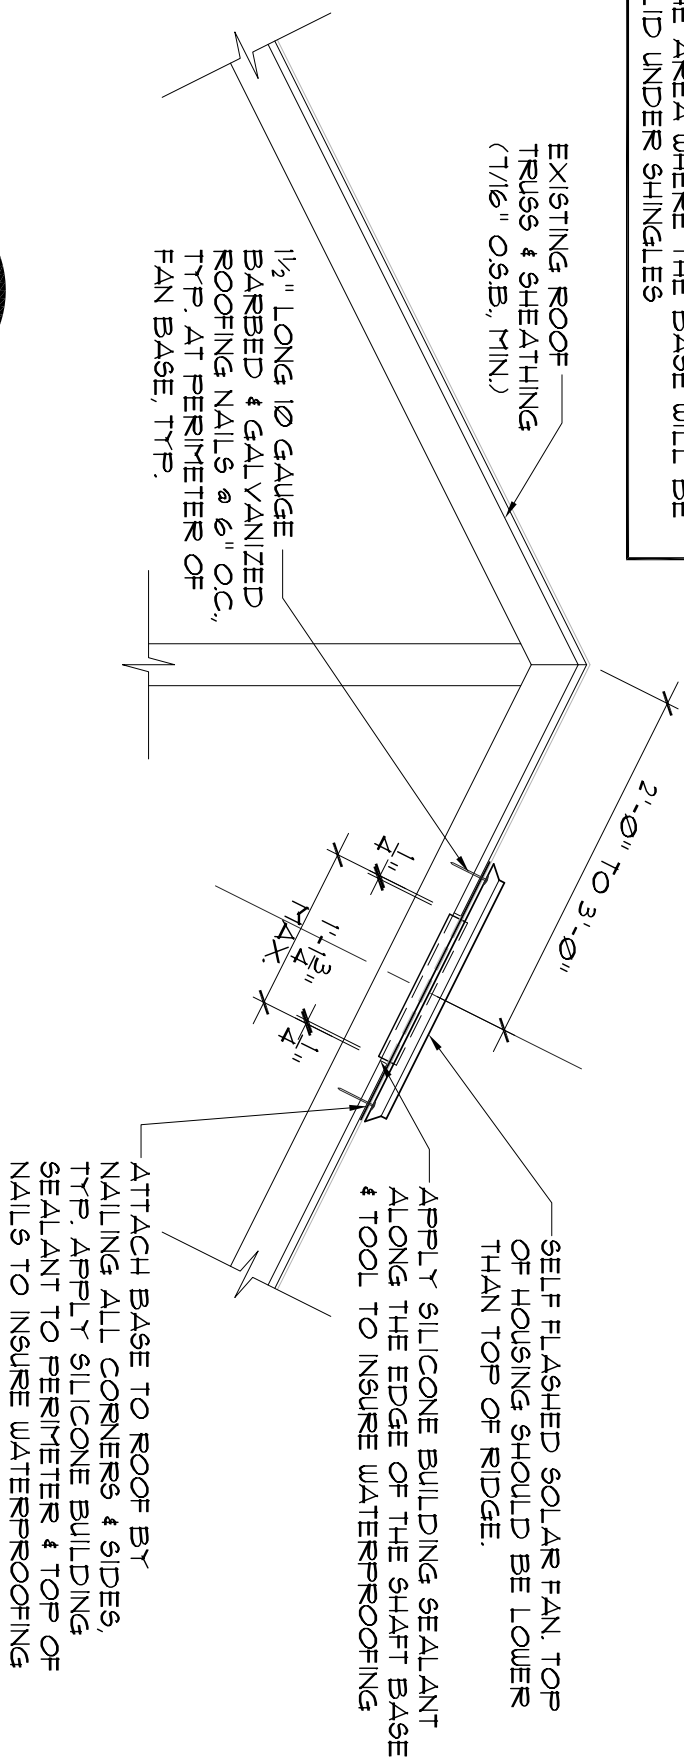

1 SECTION 1 of NEW ROOF OPENING
 SCALE: 3/4" = 1'-0"

NOTE: REMOVE ANY ROOFING NAILS IN THE AREA WHERE THE BASE WILL BE SLID UNDER SHINGLES

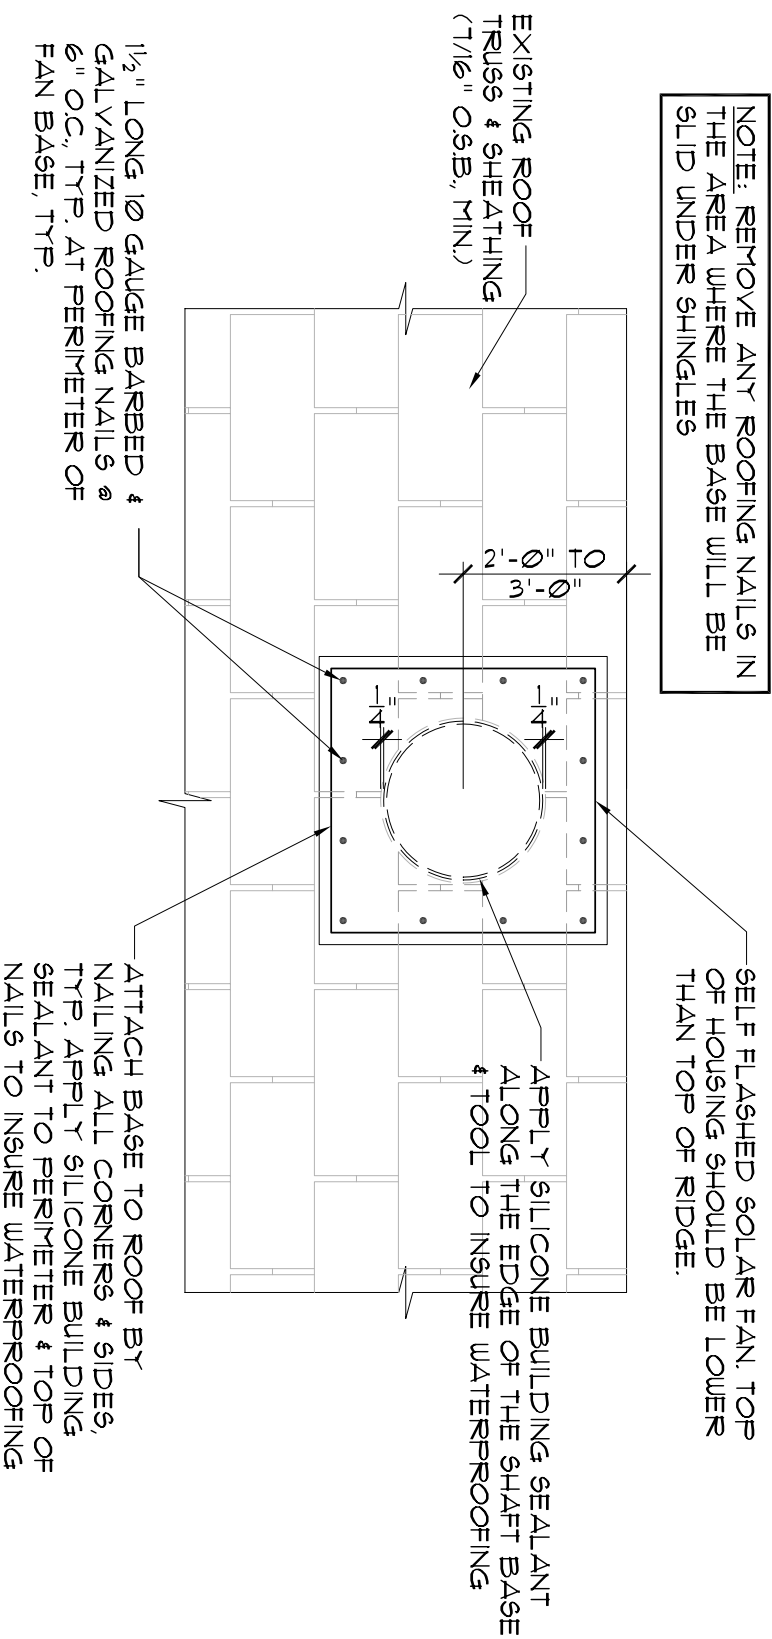

2 NEW ROOF OPENING PLAN
 SCALE: 3/4" = 1'-0"

Robert L. Ploverfield, Jr., P.E.
 FL Registration No. 39759

Solar Fan Installation
 State of Florida

PLOWFIELD & ASSOCIATES
 R.L. PLOWFIELD & ASSOCIATES, INC.
 Structural Engineers
 1090 Villa Springs Drive
 Winter Springs, FL 32708
 Eng. Business #82395
 Phone: (407) 697-6657
 Fax: (407) 697-6480
 plowfield@assocadates.com

REV. NO.	DATE	DESCRIPTION

JOB NO.:	06093
DRAWN BY:	TLW
CHECKED BY:	RLP
APPROVED BY:	RLP
DATE:	04/10/06
SHEET	
SK-01	